

EMERGENCY LIGHTING



STEEL RUNNING MAN SIGN

OFS-F5024CA / OFS-F5025CA




Features


- High-brightness, long-life LEDs
- Dual input voltage: 120 VAC / 347 VAC
- Test switch and AC power indicator included
- Universal mounting: wall, ceiling, or flush mount
- Single- or double-face configuration with interchangeable legends
- Powder-coated steel frame
- Adjustable combo lamp heads
- Overcharge and over-discharge protection



Light Distribution Curves

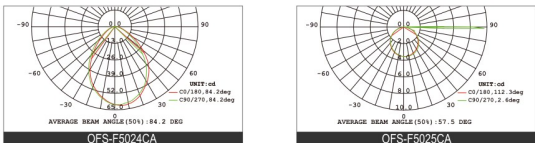


Product Dimensions



Product Parameters


Model Name	OFS-F5024CA	OFS-F5025CA
Input Voltage	AC120/347V, 60Hz, 50mA	AC120/347V, 60Hz, 50mA
Light Source	White DIP5mm(9pcs)&SMD2835(24pcs)	White DIP5mm(9pcs)
Input Power	4W	4W
Emergency Power	1.8W	1.8W
Operation Mode	Maintained for the sign; Non-maintained for the combo heads	Maintained
Emergency Duration	90 Minutes	90 Minutes
Emergency Luminance Flux	100lm	/
Recharge Time	24 Hrs	24 Hrs
Battery	Ni-Cd 3.6V, 1200mAh	Ni-Cd 3.6V, 600mAh
Battery Life	Up to 4 years	Up to 4 years
Use Environment	Damp Locations	Damp Locations
Operation Temp Range	0 C -40 C	0 C -40 C
Remote Capable	/	/
Max. mounting height	8.4ft (2.6m)	/

EDGE-LIT RUNNING MAN SIGN OFS-B2408U

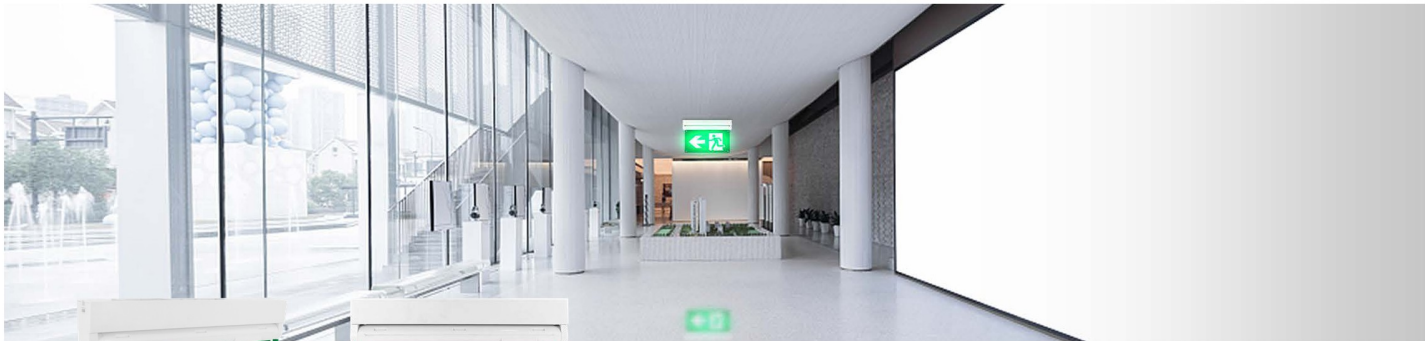


- Features**
- High-brightness, long-life LEDs
 - Universal AC input voltage: 120–347 VAC
 - Single- or double-face configuration with interchangeable legends
 - 3-hour emergency backup duration
 - Acrylic panel can be rotated to any angle from 0° to 180°

Light Distribution Curves



Product Dimensions

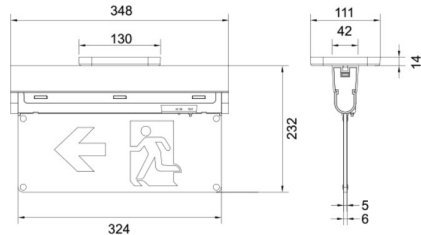

Unit:mm

Product Parameters

Model Name	OFS-B2408U
Input Voltage	AC120-347V, 50/60Hz, 30mA
Light Source	SMD4014(16pcs)
Input Power	3.5W
Emergency Power	1.5W
Operation Mode	Maintained
Emergency Duration	180 Minutes
Emergency Luminance Flux	/
Recharge Time	24 Hrs
Battery	Ni-Cd 3.6V, 900mAh
Battery Life	Up to 4 years
Use Environment	Damp Locations
Operation Temp Range	0 ℃ -40 ℃
Remote Capable	/
Max. mounting height	/

EMERGENCY EXIT SIGN

OFS-B2408U-R / OFS-B2408U-G









Features

- High-brightness, long-life LEDs
- Universal AC input voltage: 120–347 VAC
- Single- or double-face configuration with interchangeable legends
- 3-hour emergency backup duration
- Acrylic panel rotates to any angle from 0° to 180°

Light Distribution Curves



Product Dimensions

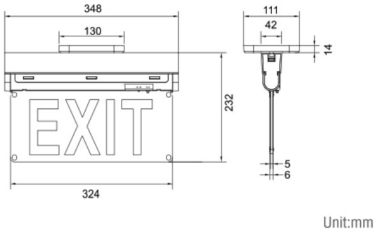

Product Parameters

Model Name	OFS-B2408U-R	OFS-B2408U-G
Input Voltage	AC120-347V, 50/60Hz, 30mA	AC120-347V, 50/60Hz, 30mA
Light Source	SMD4014(16pcs)	SMD4014(16pcs)
Input Power	3.5W	3.5W
Emergency Power	1.5W	1.5W
Operation Mode	Maintained	Maintained
Emergency Duration	180 Minutes	180 Minutes
Emergency Luminance Flux	/	/
Recharge Time	24 Hrs	24 Hrs
Battery	Ni-Cd 3.6V, 900mAh	Ni-Cd 3.6V, 900mAh
Battery Life	Up to 4 years	Up to 4 years
Use Environment	Damp Locations	Damp Locations
Operation Temp Range	0 °C -40 °C	0 °C -40 °C
Remote Capable	/	/
Max. mounting height	/	/

EMERGENCY EXIT SIGN

OFS-B5108U-G/R




Features


- High-brightness, long-life LEDs
- Dual input voltage: 120 VAC / 277 VAC
- Test switch and AC power indicator included
- Overcharge and over-discharge protection
- Universal mounting: wall, ceiling, or flag mount
- Single- or double-face configuration
- Available with white or black housing
- Overcharge and over-discharge protection



Light Distribution Curves

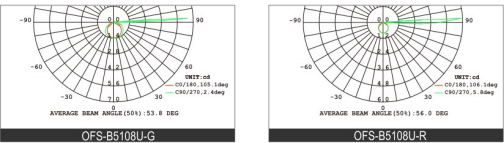

Product Dimensions




Unit:mm

Product Parameters


Model Name	OFS-B5108U-R	OFS-B5108U-G
Input Voltage	AC120/277V, 60Hz, 200mA	AC120/277V, 60Hz, 200mA
Light Source	RED DIP5mm(12pcs)	RED DIP5mm(12pcs)
Input Power	3.5W	3.5W
Emergency Power	0.36W	0.36W
Operation Mode	Maintained	Maintained
Emergency Duration	90 Minutes	90 Minutes
Emergency Luminance Flux	/	/
Recharge Time	24 Hrs	24 Hrs
Battery	Ni-Cd 3.6V, 900mAh	Ni-Cd 3.6V, 900mAh
Battery Life	Up to 4 years	Up to 4 years
Use Environment	Damp Locations	Damp Locations
Operation Temp Range	0 °C -40 °C	0 °C -40 °C
Remote Capable	/	/
Max. mounting height	/	/

EMERGENCY EXIT SIGN COMBO OFS-F5126U-G/R

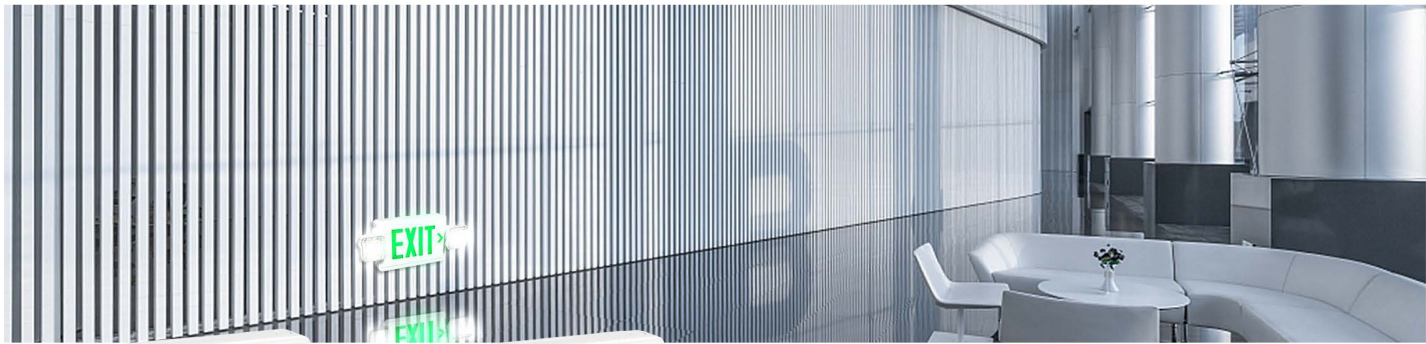


- Features**
- High-brightness, long-life LEDs
 - Dual input voltage: 120 VAC / 277 VAC
 - Test switch and AC power indicator included
 - Universal mounting: wall, ceiling, or flag mount
 - Single- or double-face configuration
 - Available with white or black housing
 - Integrated overcharge and over-discharge protection

Light Distribution Curves

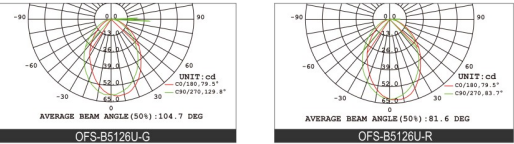

Product Dimensions

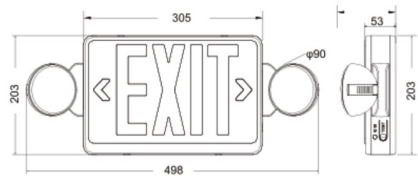


Unit:mm

Product Parameters

Model Name	OFS-F5126U-R	OFS-F5126U-G
Input Voltage	AC120/277V, 60Hz, 50mA	AC120/277V, 60Hz, 50mA
Light Source	RED DIP5mm(12pcs)&SMD 2835(24pcs)	RED DIP5mm(12pcs)&SMD 2835(24pcs)
Input Power	3.5W	3.5W
Emergency Power	1.6W	1.6W
Operation Mode	Maintained for the sign Non-maintained for the combo heads	Maintained for the sign Non-maintained for the combo heads
Emergency Duration	90 Minutes	90 Minutes
Emergency Luminance Flux	100lm	100lm
Recharge Time	24 Hrs	24 Hrs
Battery	Ni-Cd 3.6V, 1200mAh	Ni-Cd 3.6V, 1200mAh
Battery Life	Up to 4 years	Up to 4 years
Use Environment	Damp Locations	Damp Locations
Operation Temp Range	0 °C -40 °C	0 °C -40 °C
Remote Capable	/	/
Max. mounting height	8.1ft (2.5m)	8.1ft (2.5m)

EMERGENCY EXIT SIGN COMBO

OFS-F5130U-G/R

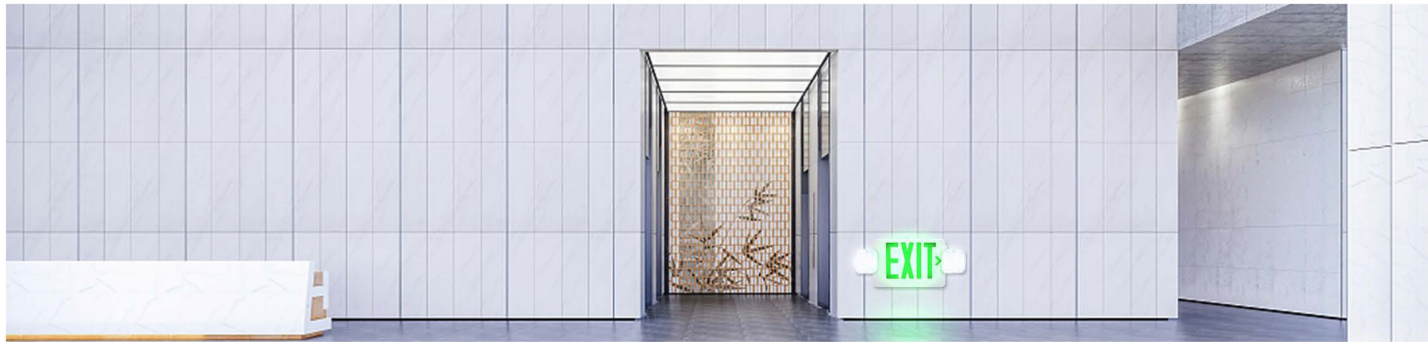


Features


- High-brightness, long-life LEDs
- Dual input voltage: 120 VAC / 277 VAC
- Test switch and AC power indicator included
- Universal mounting: wall, ceiling, or flag mount
- Single- or double-face configuration
- Available with white or black housing
- Integrated overcharge and over-discharge protection



Light Distribution Curves

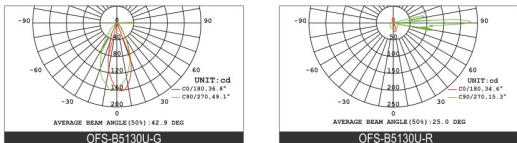

Product Dimensions

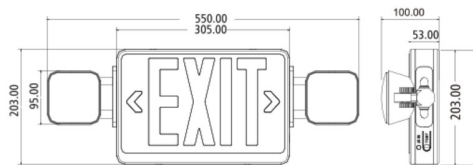

Unit:mm

Product Parameters

Model Name	OFS-F5130U-R	OFS-F5130U-G
Input Voltage	AC120/277V, 60Hz, 50mA	AC120/277V, 60Hz, 50mA
Light Source	RED DIP5mm(12pcs)&SMD 2835(24pcs)	RED DIP5mm(12pcs)&SMD 2835(24pcs)
Input Power	3.5W	3.5W
Emergency Power	1.6W	1.6W
Operation Mode	Maintained for the sign Non-maintained for the combo heads	Maintained for the sign Non-maintained for the combo heads
Emergency Duration	90 Minutes	90 Minutes
Emergency Luminance Flux	100lm	100lm
Recharge Time	24 Hrs	24 Hrs
Battery	Ni-Cd 3.6V, 1200mAh	Ni-Cd 3.6V, 1200mAh
Battery Life	Up to 4 years	Up to 4 years
Use Environment	Damp Locations	Damp Locations
Operation Temp Range	0 °C -40 °C	0 °C -40 °C
Remote Capable	/	/
Max. mounting height	12.9 ft (3.9 m)	12.9 ft (3.9 m)

EMERGENCY EXIT SIGN

OFS-Z2010A-R / OFS-Z2010A-G / OFS-Z2110A-R / OFS-Z2110A-G




Features

- Long-life LEDs
- Universal input voltage: 100–240 VAC
- Non-maintained operation mode
- Supplied with self-adhesive legend set
- ABS / PC housing with vandal-resistant construction
- Ceiling, wall, side, or hang mounting options
- Test switch and AC power indicator included
- Single- or double-face configuration
- Integrated overcharge and over-discharge protection
- 1-year warranty



Product Dimensions



Unit:mm

Product Parameters

Model #	Voltage	Emergency duration	Emergency Lumen	Battery	Light Resource	Material
OFS-Z2010A-R	AC100-240V	3h	25lm	Ni-Cd1.2V 0.6Ah	7pcs SMD2835	ABS
OFS-Z2010A-G	AC100-240V	3h	25lm	Ni-Cd1.2V 0.6Ah	7pcs SMD2835	ABS
OFS-Z2110A-R	AC100-240V	3h	20lm	Ni-Cd1.2V 0.6Ah	7pcs SMD2835	ABS
OFS-Z2110A-G	AC100-240V	3h	20lm	Ni-Cd1.2V 0.6Ah	7pcs SMD2835	ABS


EMERGENCY EXIT SIGN W/ COMBO HEAD

OFS-B5208A-R/G / OFS-F5226A-R/G / OFS-F5230A-R/G



- Features**
- High-brightness, long-life LEDs
 - High-impact, UV-stabilized flame-retardant thermoplastic housing
 - Nickel-cadmium (Ni-Cd) battery meets emergency lighting requirements
 - Test switch and AC power indicator included
 - Surface wall, ceiling, or end mounting options
 - Single- or double-face configuration with interchangeable faceplates
 - Adjustable combo lamp heads
 - Canopy included
 - Operating temperature range: 0°C to 40°C (32°F to 104°F)
 - 1-year warranty

Product Dimensions

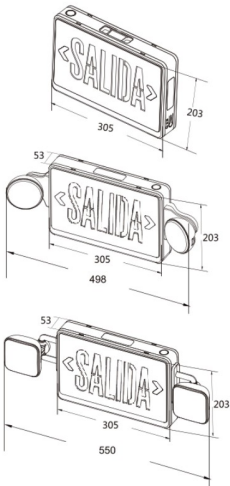

Unit:mm

Product Parameters

Model #	Voltage	Emergency Power	Emergency Lumen	Battery	Light Resource	Material
OFS-F5208A-R/G	AC120/277V	0.36W	N/A	Ni-Cd 1.2V 0.9Ah	12pcs DIP5mm-Red 8pcs DIP5mm-Green	ABS+PMMA
OFS-F5226A-R/G	AC120/277V	1.6W	100lm	Ni-Cd 3.6V 1.2Ah	12pcs DIP5mm Red or Green+ 24pcs SMD2835	ABS+PMMA
OFS-F5230A-R/G	AC120/277V	1.6W	100lm	Ni-Cd 3.6V 1.2Ah	12pcs DIP5mm Red or Green+ 24pcs SMD2835	ABS+PMMA

EMERGENCY BUCKHEAD OFS-B2310E / OFS-B2410E / OFS-B2445E-(T) / OFS-B2645E-(T)




Features

- 3-hour emergency illumination
- Multiple installation methods: ceiling or wall mounting
- Wall-mount accessories not included
- CE and RoHS approved
- IP65 rated
- Interchangeable legends included



Product Dimensions

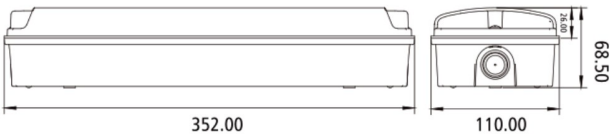

Unit:mm

Product Parameters

Model #	Voltage	AC Power	Emergency Power	AC Lumen	Emergency Lumen	Battery
OFS-B2310E	220-240V	8.5W	2.0W	400lm	200lm	Ni-Cd SC3.6V 2.0Ah
OFS-B2410E	220-240V	8.5W	2.0W	500lm	250lm	Ni-Cd SC3.6V 2.0Ah
OFS-B2445E	220-240V	5W	1.3W	135lm	135lm	Ni-Cd SC3.6V 1.5Ah
OFS-B2445E-T	220-240V	5W	1.3W	150lm	150lm	Ni-Cd SC3.6V 1.5Ah
OFS-B2645E	100-240V	3.5W	1.5W	130m	130lm	Lithium 3.7V 1.5Ah
OFS-B2645E-T	100-240V	3.5W	1.5W	130lm	130lm	Lithium 3.7V 1.5Ah



Orbis Group LLC.
E: sales@orbisfire.com
T: +1 (508)-709-7779
W: www.orbisfire.com

Headquarters: 945 Concord St.,
Framingham, MA,
USA, 01701